


# GEROTOR HYDRAULIC PUMP

Compact & high efficiency  
military grade positive displacement  
pump for airborne platforms

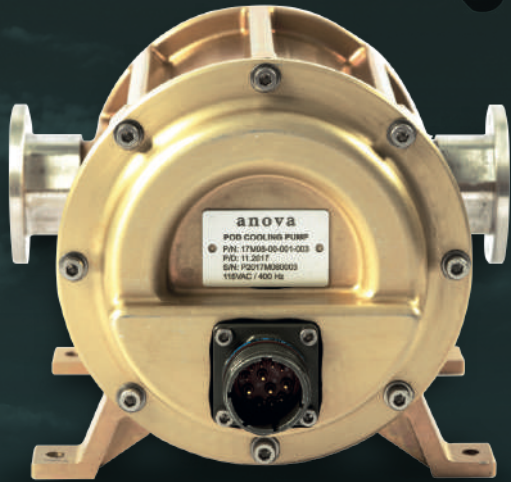

## Technical Data

Technical Features
Motor: 115VAC 400 Hz
Nominal Performance: 35 LPM @ 3 bar
Operating Conditions
Operating Temperature: (-54°C) - (+71°C)
Medium: Tested with PAO
Dimensions and Weight
Width: 211 mm
Depth: 165 mm
Height: 125 mm
Weight: 5 Kg (In Dry Conditions)

- Wet running, asynchronous motor driven gerotor type hydraulic pump
- Low weight, low volume,
- Large range working temperature,
- Various connection types,
- Pump and motor all in one compact body design,
- Qualified per, MIL-STD-810 ve MIL-STD-461

